

版次	修 改 内 容	日期
6		

NOTES:

1. MATERIAL SPECIFICATION


1-1. HOUSING: LCP+30% G.F UL94 V-0. COLOR: BLACK.

1-2. CONTACT: COPPER ALLOY C2680R-H T=0.20mm.





1-3. SHELL: STAINLESS STEEL (SUS304R-1/2H T=0.50mm).

2. PLATING SPECIFICATION


2-1. CONTACT: $NI50\mu''$ UNDER PLATED, GOLD FLASH PLATED ON THE FUNCTIONAL AREA OF CONTACT, GOLD PLATING OR TIN ON SOLDER AREA.

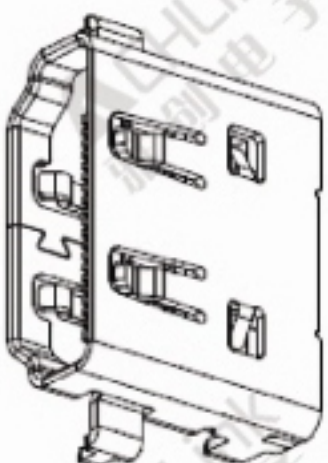

3D VIEW

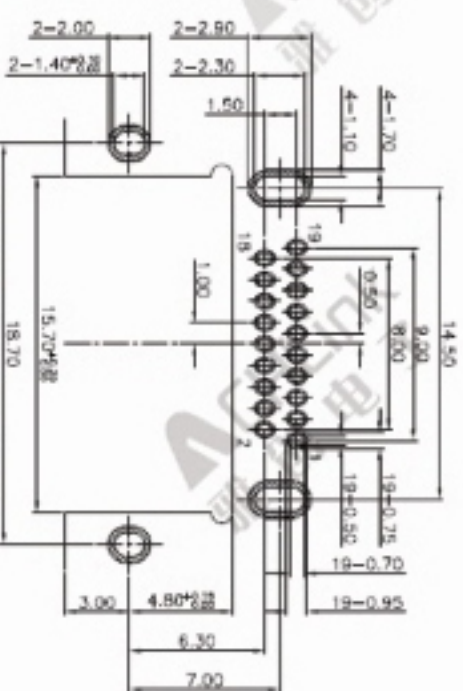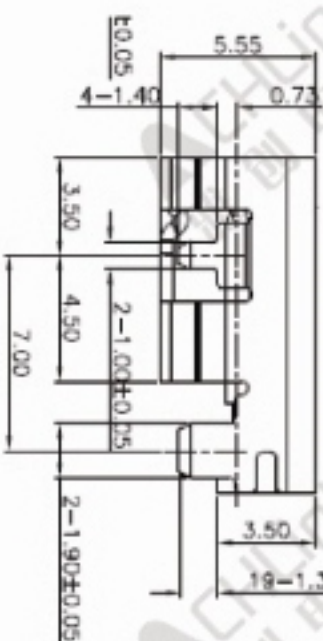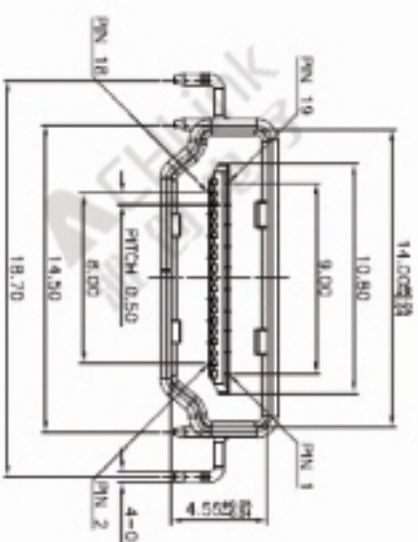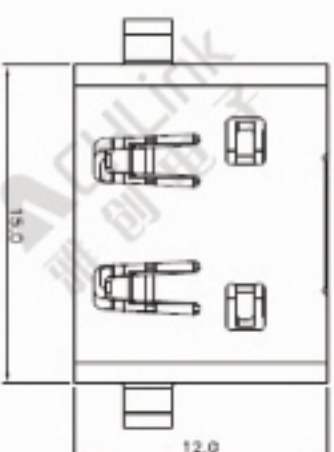

RECOMMENDED PCB LAYOUT VIEW
(THICKNESS=1.2±0.10mm)
(TOLERANCE=±0.03mm)

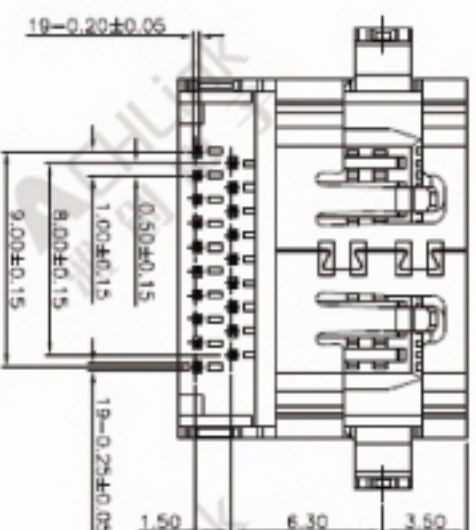

APPROVED:		UNLESS OTHERWISE SPECIFIED TOLERANCE	X.XX ±0.20	ACH 雅创电子有限公司 ACH ELECTRONICS CO., LTD TEL: 0755-48821010 FAX: 0755-488210129
CHECKED:		X.XX ±0.15		
DRAWN:	1cy	2016-08-31	X.XXX ±0.05	DRAWN NAME: HWK 19pin板端插座, 0.50 Pitch, 正向沉板式
UNIT	REV	CUSTOMER NO:	PRODUCT NO:	
	A/0		CUSTOMER P/N:	